

10020 Data Sheet




Type 1,2&3 SPD Single Pole



- Compliant to BS EN 61643-11
- Suitable for TNC-S and TN-S installations
- Single pole design
- Remote changeover contacts as standard
- Din rail mountable
- Recommended backup fuse / MCB 63A
- Recommended cable size minimum 16mm



SCAN THE QR CODE FOR THE
**INSTALLATION
INSTRUCTIONS**

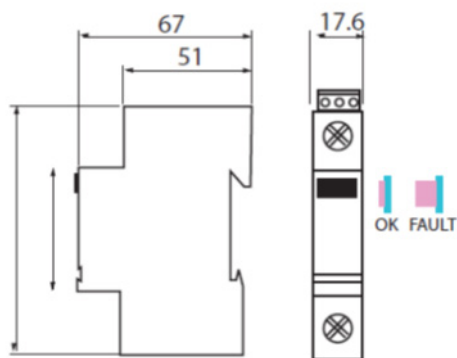

Technical Data	10020
Maximum Continuous Voltage - U_c	275V
Lightning Impulse Current 10/350 μ s - I_{imp}	12.5kA
Total Lightning Impulse Current 10/350 μ s - I_{Total}	12.5kA
Nominal Discharge Current 8/20 μ s - I_n	20kA
Maximum Discharge Current 8/20 μ s - I_{max}	50kA
Voltage Protection Level - U_p	$\leq 1.2kV$
Response Time - t_a	$\leq 25ns$
Tightening Torque	3Nm
Operating Temperature	-40°C to +80°C
Mounting On	35mm DIN rail
Indication of Status	Button & Remote
Classification According to BS EN 61643-11	Type 1, 2 & 3