

30105 Data Sheet

Type 2/3 Compact SPD



SURGE
PROTECTION DEVICES
LTD



- Compliant to BS EN 61643-11
- Suitable for TNC-S and TN-S installations
- TP&N compact 3 module design
- Din rail mountable
- Recommended backup fuse / MCB 16A
- Recommended cable size minimum 6mm



SCAN THE QR CODE FOR THE
**INSTALLATION
INSTRUCTIONS**

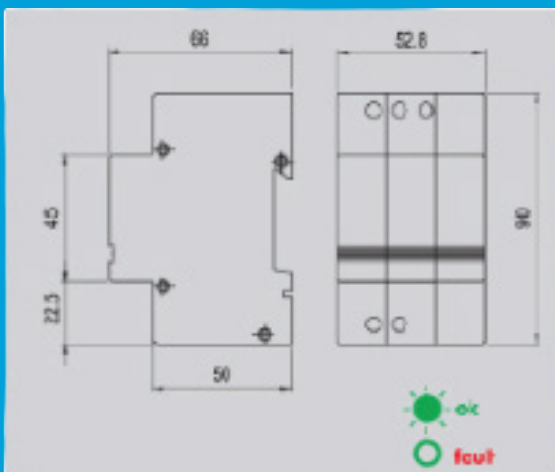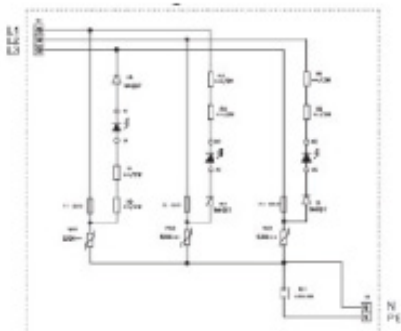

Technical Data	30105
Maximum Continuous Voltage - U_c	275V
Nominal Discharge Current 8/20 μ s - I_n	3kA
Combined Impulse L/N - U_{oc}	6kV
Combined Impulse N/PE - U_{oc}	10kV
Voltage Protection Level - U_p @ U_{oc}	$\leq 1.2kV$
Response Time - t_r	$\leq 25ns$
Tightening Torque	3Nm
Operating Temperature	-40°C to +70°C
Dimensions	3 Modules
Mounting On	35mm DIN rail
Indication of Status	LED & Remote
Classification According to BS EN 61643-11	Type 2/3

01484 851747

● info@surgedevice.co.uk ●

