

32006 Data Sheet

Type 3 SPD



SURGE
PROTECTION DEVICES
LTD



- Compliant to BS EN 61643-11
- Suitable for TNC-S, TN-S and TT installations
- Audible alarm indication
- Designed to individually protect alarm panels, fuse spurs and individual sockets
- Small design for easy installation
- Earth leakage free
- Recommended backup fuse / MCB 16-32A



SCAN THE QR CODE FOR THE
**INSTALLATION
INSTRUCTIONS**

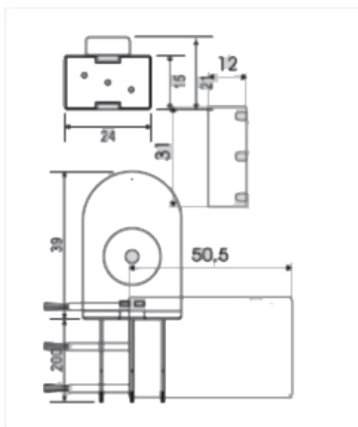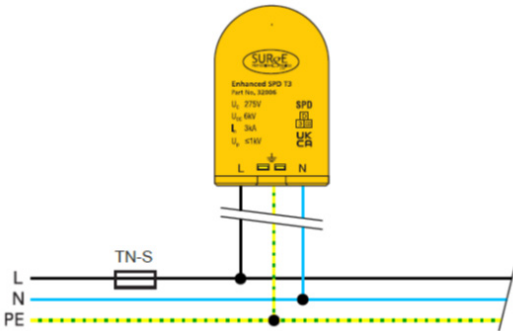

Technical Data	32006
Maximum Continuous Voltage - U_c	275V
Nominal Discharge Current 8/20 μ s - I_n	3kA
Combined Impulse - U_{oc}	6kV
Voltage Protection Level - U_p @ U_{oc}	≤ 1.3 kV L-N
Voltage Protection Level - U_p @ U_{oc}	≤ 1.00 kV L/N-PE
Response Time - t_A	≤ 25 ns L-N
Response Time - t_A	≤ 100 ns L/N-PE
Operating Temperature	-40°C to +70°C
Dimensions	39mm x 24mm x 21mm - Excluding Cable
Backup Fuse	16-32A
Indication of Status	Audible Alarm
Classification According to BS EN 61643-11	Type 3