

381245 Data Sheet

150V Single Pole Type 2 SPD



SURGE
PROTECTION DEVICES
LTD



- Compliant to BS EN 61643-11
- 150V SPD designed for 120V installations
- Suitable for TNC-S and TN-S installations
- Window Indication
- Pluggable replacement modules
- Din rail mountable
- Recommended backup fuse / MCB 32A
- Recommended cable size minimum 6mm



SCAN THE QR CODE FOR THE
**INSTALLATION
INSTRUCTIONS**

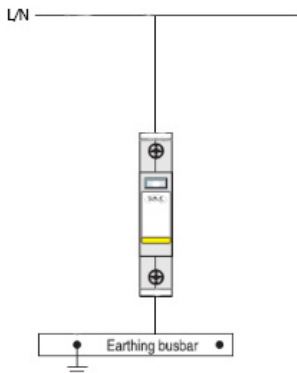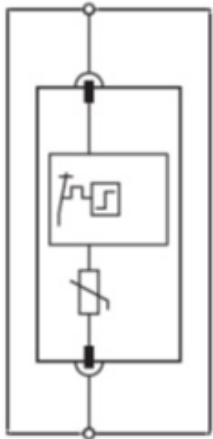

Technical Data	381245
Maximum Continuous Voltage - U_c	150V
Nominal Discharge Current 8/20 μ s - I_n	15kA
Maximum Discharge Current 8/20 μ s - I_{max}	40kA
Voltage Protection Level - U_p @ I_n	≤ 1.0 kV
Voltage Protection Level - U_p @ 5kA	≤ 600 V
Response Time - t_a	≤ 25 ns
Tightening Torque	2Nm
Operating Temperature	-40°C to +80°C
Dimensions	1 Module
Mounting On	35mm DIN rail
Indication of Status	Window
Classification According to BS EN 61643-11	Type 2/3