

381260 Data Sheet

75V Single Pole Type 2 SPD



SURGE
PROTECTION DEVICES LTD



- Compliant to BS EN 61643-11
- 75V single pole SPD
- Suitable for TNC-S and TN-S installations
- Window Indication
- Pluggable replacement modules
- Din rail mountable
- Recommended backup fuse / MCB 32A
- Recommended cable size minimum 6mm



SCAN THE QR CODE FOR THE
**INSTALLATION
INSTRUCTIONS**

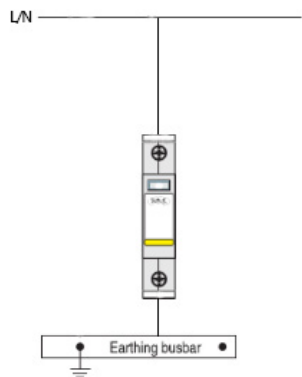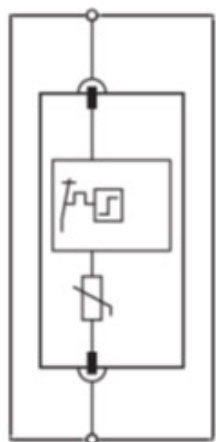

Technical Data	381260
Maximum Continuous Voltage - U_c	75V
Nominal Discharge Current 8/20 μ s - I_n	20kA
Maximum Discharge Current 8/20 μ s - I_{max}	40kA
Voltage Protection Level - U_p @ I_n	$\leq 450V$
Voltage Protection Level - U_p @ 5kA	$\leq 350V$
Response Time - t_a	$\leq 25ns$
Tightening Torque	2Nm
Operating Temperature	-40°C to +80°C
Dimensions	1 Module
Mounting On	35mm DIN rail
Indication of Status	Window
Classification According to BS EN 61643-11	Type 2/3