

381270/1 Data Sheet

275V Single Pole Type 2 SPD



SURGE
PROTECTION DEVICES
LTD



- Compliant to BS EN 61643-11
- 275V SPD designed for 230V installations
- Suitable for TNC-S and TN-S installations
- Single pole device
- Pluggable replacement modules
- Din rail mountable
- Recommended backup fuse / MCB 32A
- Recommended cable size minimum 6mm



SCAN THE QR CODE FOR THE
**INSTALLATION
INSTRUCTIONS**

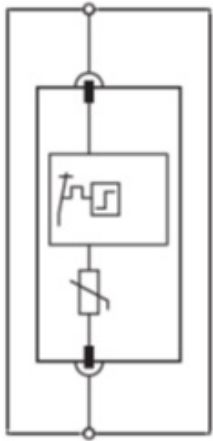

Technical Data	381270/1
Maximum Continuous Voltage - U_c	275V
Nominal Discharge Current 8/20 μ s - I_n	20kA
Maximum Discharge Current 8/20 μ s - I_{max}	40kA
Voltage Protection Level - U_p @ I_n	≤ 1.3 kV
Voltage Protection Level - U_p @ 5kA	≤ 1.00 kV
Response Time - t_r	≤ 25 ns
Tightening Torque	3Nm
Operating Temperature	-40°C to +80°C
Dimensions	1 Modules
Mounting On	35mm DIN rail
Indication of Status	Flag
Classification According to BS EN 61643-11	Type 2