

# 381270/3 Data Sheet

## 275V Single Pole Type 2 SPD



**SURGE**  
PROTECTION DEVICES  
LTD



- Compliant to BS EN 61643-11
- 275V SPD designed for 230V installations
- Suitable for TNC-S and TN-S installations
- Three pole device
- Pluggable replacement modules
- Din rail mountable
- Recommended backup fuse / MCB 32A
- Recommended cable size minimum 6mm



SCAN THE QR CODE FOR THE  
**INSTALLATION  
INSTRUCTIONS**

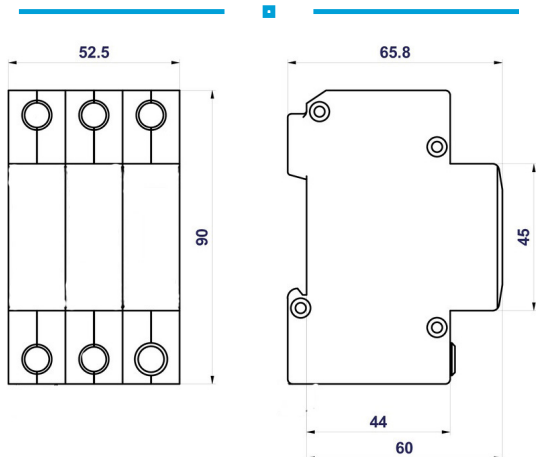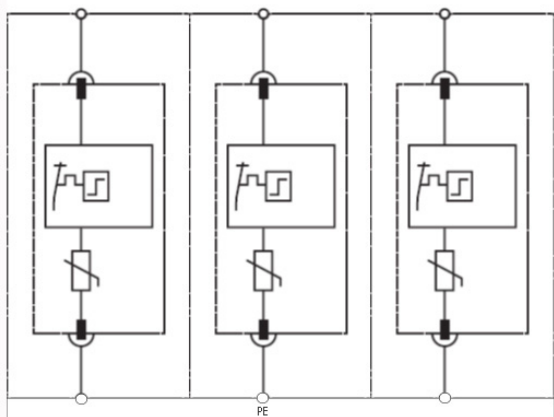

Technical Data	381270/3
Maximum Continuous Voltage - $U_c$	275V
Nominal Discharge Current 8/20 $\mu$ s - $I_n$	20kA
Maximum Discharge Current 8/20 $\mu$ s - $I_{max}$	40kA
Voltage Protection Level - $U_p$ @ $I_n$	$\leq 1.3kV$
Voltage Protection Level - $U_p$ @ 5kA	$\leq 1.00kV$
Response Time - $t_r$	$\leq 25ns$
Tightening Torque	3Nm
Operating Temperature	-40°C to +80°C
Dimensions	3 Modules
Mounting On	35mm DIN rail
Indication of Status	Flag
Classification According to BS EN 61643-11	Type 2

01484 851747

● info@surgedevelopices.co.uk ●

