

381275 Data Sheet



275V Single Pole Type 2 SPD



- Compliant to BS EN 61643-11
- 275V SPD designed for 230V installations
- Suitable for TNC-S and TN-S installations
- Window Indication
- Pluggable replacement modules
- Volt free remote monitoring contacts
- Recommended backup fuse / MCB 32A
- Recommended cable size minimum 6mm



SCAN THE QR CODE FOR THE
**INSTALLATION
INSTRUCTIONS**

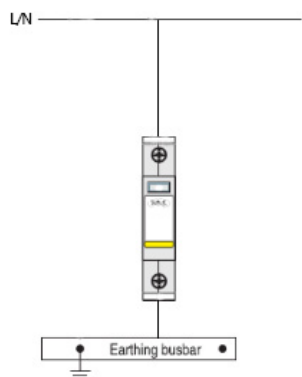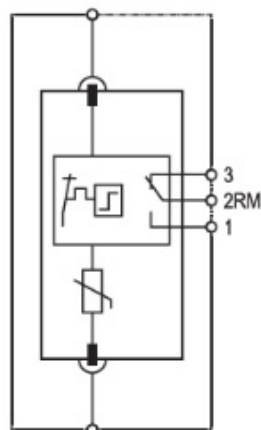

Technical Data	381275
Maximum Continuous Voltage - U_c	275V
Nominal Discharge Current 8/20 μ s - I_n	20kA
Maximum Discharge Current 8/20 μ s - I_{max}	40kA
Voltage Protection Level - U_p @ I_n	$\leq 1.25kV$
Voltage Protection Level - U_p @ 5kA	$\leq 1kV$
Response Time - t_r	$\leq 25ns$
Tightening Torque	2Nm
Operating Temperature	-40°C to +80°C
Dimensions	1 Module
Mounting On	35mm DIN rail
Indication of Status	Window & Remote
Classification According to BS EN 61643-11	Type 2/3