

# 381300 Data Sheet

## 440V Single Pole Type 2 SPD



**SURGE**  
PROTECTION DEVICES  
LTD



- Compliant to BS EN 61643-11
- 440V Maximum continuous operating voltage
- Suitable for TNC-S and TN-S installations
- Window Indication
- Pluggable replacement modules
- Din rail mountable
- Recommended backup fuse / MCB 32A
- Recommended cable size minimum 6mm



SCAN THE QR CODE FOR THE  
**INSTALLATION  
INSTRUCTIONS**

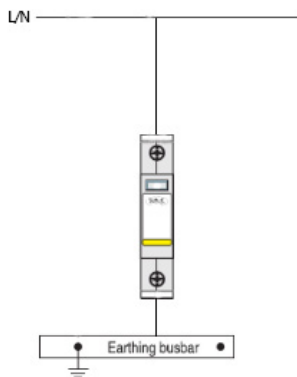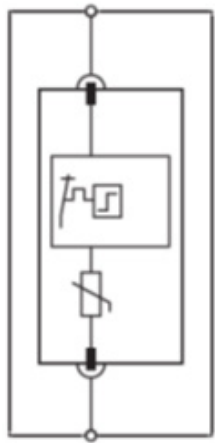

Technical Data	381300
Maximum Continuous Voltage - $U_c$	440V
Nominal Discharge Current 8/20 $\mu$ s - $I_n$	15kA
Maximum Discharge Current 8/20 $\mu$ s - $I_{max}$	40kA
Voltage Protection Level - $U_p$ @ $I_n$	$\leq 2.15$ kV
Voltage Protection Level - $U_p$ @ 5kA	$\leq 1.0$ kV
Response Time - $t_a$	$\leq 25$ ns
Tightening Torque	2Nm
Operating Temperature	-40°C to +80°C
Dimensions	1 Module
Mounting On	35mm DIN rail
Indication of Status	Window
Classification According to BS EN 61643-11	Type 2/3

01484 851747

● info@surgedevelopments.co.uk ●

