

T22P230V Data Sheet

Type 2 SPD


SURGE
PROTECTION DEVICES
LTD



- Compliant to BS EN 61643-11
- Suitable for TNC-S, TN-S and TT installations
- Window Indication
- Pluggable replacement modules
- Din rail mountable
- Recommended backup fuse / MCB 32A
- Recommended L/N cable size minimum 2.5mm
- Recommended PE cable size minimum 6mm



SCAN THE QR CODE FOR THE
**INSTALLATION
INSTRUCTIONS**

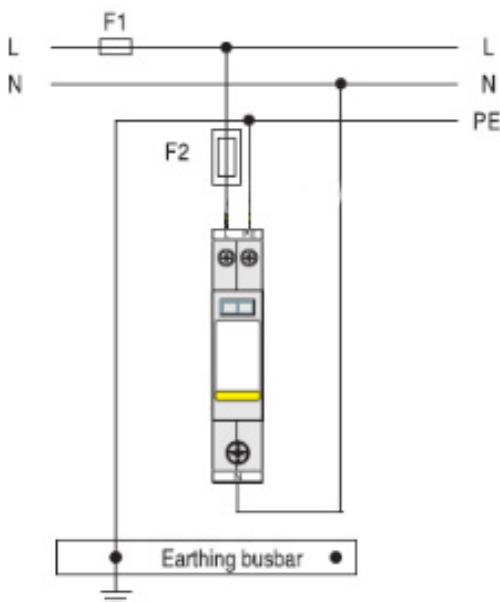

Technical Data	T22P230V
Maximum Continuous Voltage - U_c	275V
Nominal Discharge Current 8/20 μ s - I_n	L-N 5kA N-PE 10kA
Maximum Discharge Current 8/20 μ s - I_{max}	20kA
Voltage Protection Level - U_p @ I_n	$\leq 1.3kV$
Voltage Protection Level - U_p @ 3kA	$\leq 1.00kV$
Response Time - t_a	$\leq 25ns$
Tightening Torque	L-N 1.2Nm N-PE 2Nm
Operating Temperature	-40°C to +80°C
Dimensions	1 Module
Mounting On	35mm DIN rail
Indication of Status	Flag
Classification According to BS EN 61643-11	Type 2

01484 851747

● info@surgedevices.co.uk ●

